

# Cable assembly family

## Model C




### Key features

- Cable assemblies specifically designed for use with single axis accelerometers, as well as other transducers
- Configurable cable assemblies to meet a wide variety of application needs
- Connectors, cable, and overall length can be specified by the user

### Description

The Endevco Model C cable assembly family allows for user selectable cable configurations to meet a wide variety of applications. The family is specifically designed for use with single axis and triaxial accelerometers, as well as other transducers. Users can specify the sensor side connector, cable type, instrumentation side connector, and overall cable assembly length in inches. Part number configuration is listed below. Available connectors and cables are listed on the next page.

Cable assembly part number configuration

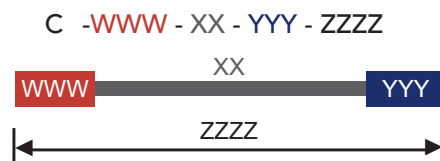

Four steps to creating a cable assembly

- |      |  |
|------|--|
| WWW  | 1. Select sensor side connector          |
| XX   | 2. Select cable type                     |
| YYY  | 3. Select instrumentation side connector |
| ZZZZ | 4. Select cable assembly length (inches) |

Examples of our most popular assemblies:

- > C-001-AC-002-0120: 10-32, general purpose, Teflon® jacket, BNC, 120 inches (10 ft)
- > C-001-AA-001-0240: 10-32, low noise, Teflon® jacket, 10-32, 240 inches (20 ft)

## Specifications

### Connector Specifications



	WWW	YYY	001	002	006
Physical	Connector type		10-32 plug	BNC plug	Pigtail (leads stripped and tinned)
	Weight oz (grams)		0.11 (3.0)	0.36 (10.3)	N/A
	Temp ranges F (C)		-67° to +500° (-55° to +260°)	-67° to +392° (-55° to +200°)	N/A
	Strain relief Type		Silicone molded boot	Silicone molded boot	N/A
	Connector OD inches (mm)		6.8 (0.27)	13.8 (0.54)	N/A

### Cable Specifications




	XX	AA	AB	AC	AD
Physical	Cable type	Coaxial Low noise Teflon® jacket	Coaxial Low noise Silicone jacket	Coaxial General purpose Teflon® jacket	Coaxial General purpose Silicone jacket
	Min. bend radius inches (mm)	0.850 (21.59)	0.950 (24.13)	0.850 (21.59)	0.850 (21.59)
	Conductor Size (AWG)	30	28	30	30
	Conductor Material	Silver plated annealed copperweld	Silver plated annealed copperweld	Silver plated annealed copperweld	Silver plated annealed copperweld
	Conductor Style	Stranded	Solid	Stranded	Stranded
	Shield Material	Silver-plated copper	Silver-plated copper	Silver-plated copper	Silver-plated copper
	Jacket Material	Wrapped Teflon®	Extruded silicone	Extruded Teflon®	Extruded silicone
	Jacket Color	Red	Red	White	Natural
	Weight Grams/Ft	3.1	3.1	2.7	2.7
	Overall Diameter (max) Inches (mm)	0.090(2.29)	0.097(2.46)	0.085 (2.16)	0.90(2.29)
Electrical	Capacitance (typical) pF/Ft	35	40	30	30
	Insulation Resistance Min GΩ-Ft	50	100	50	50
	Conductor Resistance Ω/ft	0.30	0.2	0.25	0.25
Environmental	Temp ranges F (C)	-67° to +500° (-55° to +260°)	-67° to +500° (-55° to +260°)	-67° to +500° (-55° to +260°)	-67° to +500° (-55° to +260°)
	Noise pC pk-pk	1.5pC max	1.5pC max	N/A	N/A
	Pull strength lbs, typical (min)	20 (16)	20 (16)	20 (16)	20 (16)

## Cable assembly family | Model C

Length tolerances	
Length inches (millimeters)	Tolerance inches (millimeters)
Up to 12 (304.8)	+ 1.0 (25.4)
13 to 36 (330.2 to 9.14.4)	+ 2.0 (50.8)
37 to 120 (939.8 to 3.05m)	+ 4.0 (101.6)
Over 120 (3.05m)	+ 4.0 (101.6) per 120 (3.05m) or part thereof (+12 = maximum tolerance)

### Notes

- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
- Model number definition:

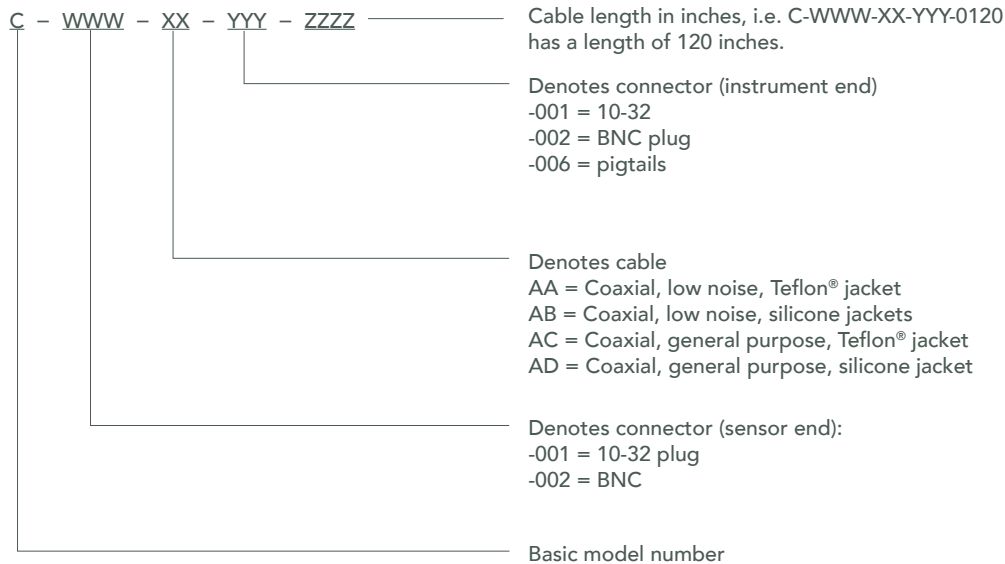

[www.endevco.com](http://www.endevco.com) | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

EDV-DS-C-100120



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit [www.endevco.com](http://www.endevco.com) for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).